



915 TEXTURED FIRE GUARD™

Textured FIRE GUARD™ ceiling panels provide a fire-resistant barrier when used in acceptable UL assemblies. Panels are available in a 24-in x 48-in square style.


FEATURES & BENEFITS

- Ideal for basements and light commercial spaces
- Acoustical; reduce noise 55%
- Installs in Prelude® 15/16-in suspension system
- Use with Prelude® XL 15/16-in Fire Guard Grid System to achieve fire-resistant UL ratings

OPTIONS



915 Textured FIRE GUARD™

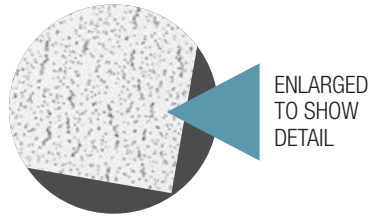

ENLARGED
TO SHOW
DETAIL

PERFORMANCE AND INSTALLATION GUIDE

Item #	Dimensions (Inches)	Edge Detail	Installation Method	Fire Resistance	Sag Resistance	Mold/ Mildew Resistance	Noise Reducing		Light Reflectance	Recycled Material Content
							NRC	CAC		
915	24 x 48 x 5/8	Square	Prelude® 15/16-in Grid*	Class A	Standard	Standard	0.55	35	0.79	38%

*Use with Prelude® XL 15/16-in Fire Guard Grid System to achieve fire-resistant UL ratings

PACKAGING GUIDE

Item #	Dimensions (Inches)	SF Per Ctn	Pcs/Ctn	Lbs/Ctn	Ctns Per Pallet	Layers Per Pallet	Warranty
915	24 x 48 x 5/8	64	8	71	36	18	1-Year

TECHLINE: 1 877 ARMSTRONG (276-7876)
techline@armstrongceilings.com

ceilings.com