NOTEC:

THE EXAMPLE LAYOUT AND CORRESPONDING BOM SHOWN ARE MEANT TO BE USED AS REFERENCE POINTS WHEN SPECIFYING A DESIGNFLEX SYSTEM.

IF YOU PLAN TO USE THE EXACT LAYOUT SHOWN, OR ANY VARIATION THEREOF, CONSIDER THE FOLLOWING NOTES:

1) DRAWING DETAILS SHOW A CEILING PLAN VIEW WHICH IS FROM A PLENUM POSITION LOOKING DOWN ONTO THE BACKSIDE OF THE CEILING SYSTEM. BOM LISTS DESCRIPTIONS THAT COORDINATE WITH THE DATA PAGES, AND THESE ITEM DESCRIPTIONS ARE BASED ON VIEWING THE FACE OF THE PRODUCTS.

2) ANGLE BRACKETS AND CORNER BRACKETS ARE INSTALLED AT STANDARD 6" OC ROUTE HOLE INCREMENTS ALONG THE MAIN BEAMS - ALL MAIN BEAMS ARE INSTALLED WITH ALIGNED ROUTE HOLES.

3) ANGLE BRACKETS USED WITHIN LAYOUTS HAVE SCREWS, WASHERS, AND NUTS INCLUDED WITH THEM FOR FASTENING TO MAIN BEAMS. IF CORNER BRACKETS ARE USED IN THE SYSTEM THEY WILL REQUIRE SCREWS THAT ARE NOT INCLUDED AND NEED TO BE SUPPLIED BY OTHERS.


4) SCREWS, RIVETS, AND OTHER GENERAL FASTENERS THAT ARE NOT INCLUDED IN BOM OR IN DETAILS BELOW, NEED TO BE SUPPLIED BY OTHERS. REFER TO INSTALLATION INSTRUCTIONS FOR DETAILS ON REQUIRED FASTENERS.

5) HANGING LOCATIONS SHOWN BELOW ARE REQUIED FOR EXACT LAYOUT AND SHOULD NOT BE MOVED.

6) CONDITIONS SHOWN ARE FOR NON-SEISMIC INSTALLATIONS (SEISMIC DESIGN CATEGORY A,B) - REFERENCE INSTALLATION INSTRUCTIONS FOR CONSIDERATIONS AND REQUIREMENTS FOR SEISMIC INSTALLATIONS.

7) BOM DOES NOT ACCOUNT FOR THE USE OF SCRAP OR EXCESS MATERIAL CUT FROM OTHER ITEMS.

8) REFER TO MASTER PARTS SHEET, PANEL SHEET, AND INSTALLATION INSTRUCTIONS ILLUSTRATIONS SHEET FOR SPECIFIC DETAIL VIEWS AND DIAGRAMS OF ALL PARTS AND PIECES LISTED IN BOM.

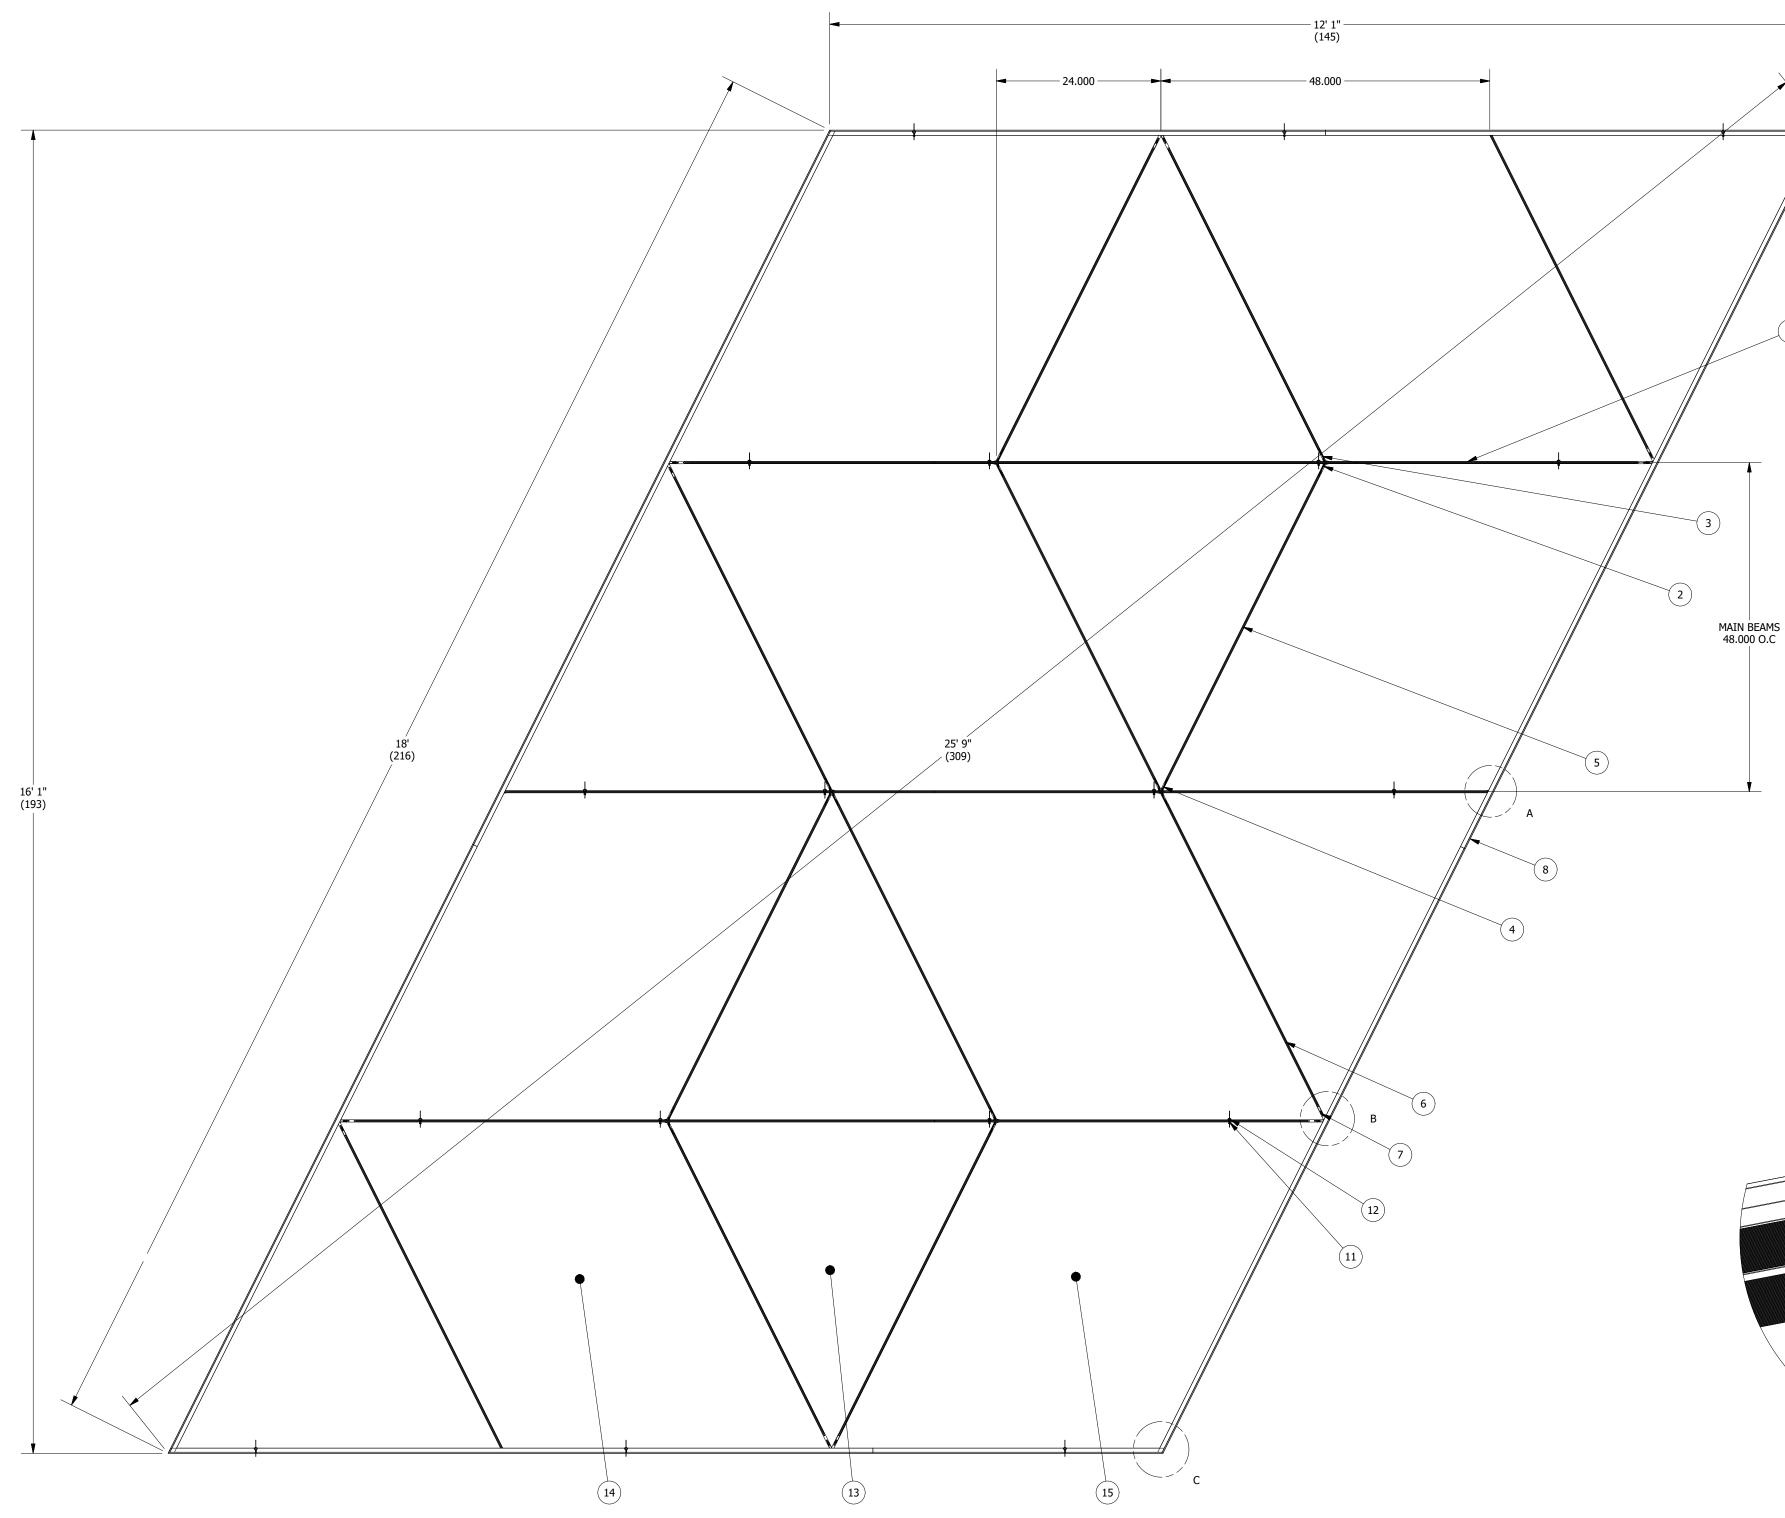

CEILING PLAN VIEW SCALE 1 / 14

	DF1612S4SP08 - 4" AXIOM VECTOR - BILL OF MATERIALS				
ITEM	QTY	STOCK NUMBER	DESCRIPTION		
1	6	7500/7501	12' ID/HD Suprafine Main Beam		
2	4	75AB60L	Suprafine 60 Deg. Left Angle Bracket		
3	6	75AB60R	Suprafine 60 Deg. Right Angle Bracket		
4	2	75AB60D	Suprafine 60 Deg. Double Angle Bracket		
5	4	XM756048	Suprafine 60 Deg. Cross Tee - 48in MBS		
6	8	XM7548	Suprafine Perimeter Cross Tee - 48in MBS		
7	12	PAC	Perimeter Agle Clip		
8	8	AX4VESTR	Axiom Vector 4" Straight		
9	10	AXTBC	AXTBC		
10	16	AX4SPLICEB	Axiom Splice Plate		
11	18	AC1210	Aircraft Cable		
12	18	ACHC	Aircraft Cable Hardware		


		DF1612S6SP08	- 6" AXIOM VECTOR - BILL OF MATERIALS
ITEM	QTY	STOCK NUMBER	DESCRIPTION
1	6	7500/7501	12' ID/HD Suprafine Main Beam
2	4	75AB60L	Suprafine 60 Deg. Left Angle Bracket
3	6	75AB60R	Suprafine 60 Deg. Right Angle Bracket
4	2	75AB60D	Suprafine 60 Deg. Double Angle Bracket
5	4	XM756048	Suprafine 60 Deg. Cross Tee - 48in MBS
6	8	XM7548	Suprafine Perimeter Cross Tee - 48in MBS
7	12	PAC	Perimeter Agle Clip
8	8	AX4VESTR	Axiom Vector 6" Straight
9	10	AXTBC	AXTBC
10	16	AX4SPLICEB	Axiom Splice Plate
11	18	AC1210	Aircraft Cable
12	18	ACHC	Aircraft Cable Hardware


	LYRA PANELS - NOT INCLUDED				
ITEM	QTY	STOCK NUMBER	DESCRIPTION		
13	8	100003	Lyra 9/16" Square Tegular - 60 Deg. 48 in Base Triangle		
14	4	100018	Lyra 9/16" Square Tegular - 60 Deg. 48 in Base Right Parallelogram		
15	4	100019	Lyra 9/16" Square Tegular - 60 Deg. 48 in Base Left Parallelogram		


EXAMPLE LAYOUT AND BOM SHOWN WITH LYRA PANELS

PANEL PRODUCT FAMILIES COMPATIBLE WITH THIS LAYOUT: LYRA PB AND OPTIMA PB

REFERENCE DATA PAGE FOR PANEL CARTON QUANTITIES

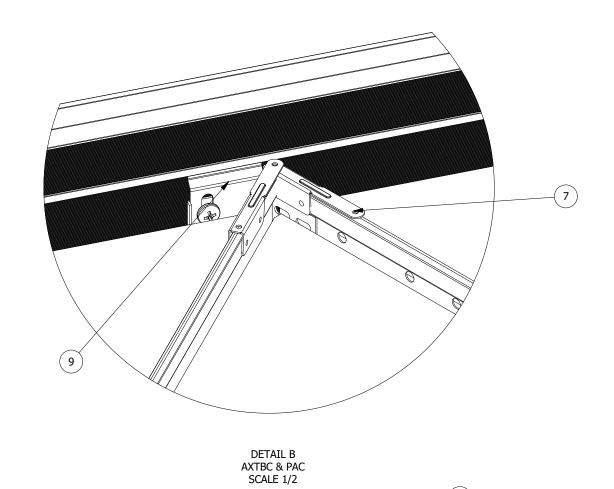

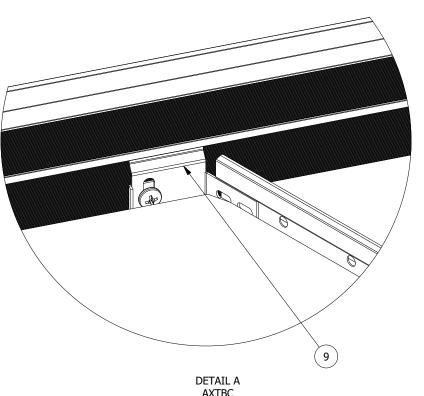

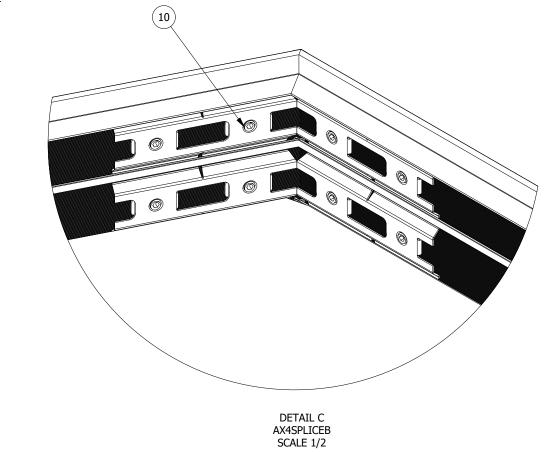



s, rules and regulations (Legal Requirements) that may be applicable for curvacy, or completeness of the drawings for a particular installation or larchitect or engineer in the particular locale of the installation to assure all architecture or engineering design services.

ical conditions which the Armstrong products depicted are installed. They are not a substitute for sequirements of local building codes, laws, statutes, ordinances, rules and regulations (Legal Requirements of local building that assumes no liability for the accuracy or completeness of the draw in purpose. The user is advised to consult with a duly licensed architect or engineer in the particula

DesignFlex Shapes Components



