

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture




FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



MetalWorks Blades – Classics 2" x 6" panels in Effects Cherry

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

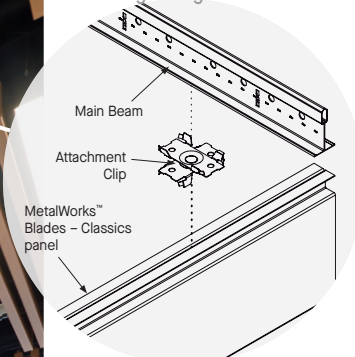

plus capabilities
to do more




armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Durable metal vertical panels in multiple sizes with swivel attachment clips that allow for design flexibility.

KEY SELECTION ATTRIBUTES

- new** • Four new Sequels™ pre-coat, wood-look finishes are part of the FAST134 program
- new** • MetalWorks™ FASTPeel™ panels feature an easier-to-remove protective film
- Now available in 17 Effects™ wood-look finishes
- Standard blade sizes in multiple lengths with either:
 - 4" depth and 1" width
 - 6" depth with 1" or 2" widths
- Premium blade sizes available:
 - Lengths up to 120"
 - Depths up to 10"
 - Widths 1" or 2"
- Available in 22-1/2", 46-1/2", 94-1/2", and 96" lengths for creative design layouts
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Blade panels available with either two factory-installed end caps, one end cap, or no end caps
- MetalWorks™ Blades – Classics panels are part of the Sustain™ portfolio (unperforated panels only)
- Create acoustical or non-acoustical upscale linear designs
- Fast, easy installation with standard Prelude® XL® 15/16" or 360° painted suspension systems
- Select finishes now standard with easier-to-remove FASTPeel™ protective film

END CAP DETAILS in Sequels Cape May Cherry



1. Factory-applied End Cap
2. Field-cut End Cap

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture



Declare.

RECYCLED
CONTENT

UP TO
15%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health **Declare Label HPD**
3rd Party CDPH

OCCUPANT EXPERIENCE

| | |
|------------------|-----|
| Climate Health | EPD |
| Ecosystem Health | EPD |
| Circular Economy | ✓ |
| Acoustics | ✓ |




MetalWorks™ Blades - Classics in Sequels Cape May Cherry

STANDARD COLORS & FINISHES Due to printing limitations, shade may vary from actual product.



Painted



Whitelume
(WHA)



Silverlume
(SIA)



Gun Metal
(MYA)

Effects™ Classic Dye-Sublimation



Effects Cherry
(FXCH)




Effects Dark Cherry
(FXDC)



Effects Oak
(FXOK)



Effects Walnut
(FXWN)



Effects Walnut
Espresso (FXWE)

Effects™ Bold Dye-Sublimation



Effects Sea Salt
(FXSS)




Effects Ginger
(FXGR)



Effects Nutmeg
(FXNM)



Effects Poppy
Seed (FXPS)



Effects Peppercorn
(FXPC)



Effects Almond
(FXAL)

Effects™ Subtle Dye-Sublimation



Effects Sesame
(FXSE)



Effects Macadamia
(FXMA)



Effects Cinnamon
(FXCM)



Effects Flax
(FXFL)



Effects Cocoa Bean
(FXCB)



Effects Coriander
(FXCO)

*Not part of the Sustain™ portfolio

CUSTOM COLORS & FINISHES



Custom Colors
Available*



Custom Wood-look
Finishes Available

* Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. For more information, visit our website at armstrongceilings.com/metalworks or contact Architectural Specialties TechLine at 1 877 276-7876 for custom panel lengths.

For premium requests contact ASQuote,
ASQuote@armstrongceilings.com

PERFORATION OPTIONS (1:2 scale shown)



M1
(Unperforated)



M15
(Rd 1612)



METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture



Declare.

RECYCLED
CONTENT

UP TO
15%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health **Declare Label**

HPD

3rd Party CDPH

OCCUPANT EXPERIENCE

Climate Health

Ecosystem Health

Circular Economy

Acoustics

EPD

EPD

✓

✓

VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

| Item No. ◆ | Description/ Dimensions D x W x L (Inches) Custom Sizes Available | |
|------------|---|--|
| 8157D41_ | Vertical panel with caps on both ends 4 x 1 x 94-1/2" | |
| 8157D61_ | 6 x 1 x 94-1/2" | |
| 8157D62_ | 6 x 2 x 94-1/2" | |
| 8156D41_ | Vertical panel with caps on both ends 4 x 1 x 46-1/2" | |
| 8156D61_ | 6 x 1 x 46-1/2" | |
| 8156D62_ | 6 x 2 x 46-1/2" | |
| 8155D41_ | Vertical panel with caps on both ends 4 x 1 x 22-1/2" | |
| 8155D61_ | 6 x 1 x 22-1/2" | |
| 8155D62_ | 6 x 2 x 22-1/2" | |
| 7202D41_ | Vertical panel with cap on one end 4 x 1 x 96" | |
| 7202D61_ | 6 x 1 x 96" | |
| 7202D62_ | 6 x 2 x 96" | |
| 7203D41_ | Vertical panel with no end caps 4 x 1 x 96" | |
| 7203D61_ | 6 x 1 x 96" | |
| 7203D62_ | 6 x 2 x 96" | |

| | CleanAssure™ Disinfectable Panels | | | | DURABILITY | | |
|---------|--------------------------------------|-----|-------|------|------------|-------|------|
| | Fire Rating | Fog | Spray | Wipe | Wash | Scrub | Soil |
| Class A | • | • | • | • | • | • | • |
| Class A | • | • | • | • | • | • | • |
| Class A | • | • | • | • | • | • | • |
| Class A | • | • | • | • | • | • | • |
| Class A | • | • | • | • | • | • | • |

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134


◆ When specifying or ordering, include the appropriate perforation and color suffix with the item number (e.g., 8157D41 M 1 5 E X C H).

ACOUSTIC INFORMATION Dots represent high level of performance.

| Blade | 4" O.C. | 6" O.C. | 12" O.C. | 16" O.C. | 20" O.C. | 24" O.C. |
|---------|---------|---------|----------|----------|----------|----------|
| 4" x 1" | 0.55 | 0.45 | 0.25 | 0.20 | 0.20 | 0.15 |
| 6" x 1" | 0.85 | 0.65 | 0.45 | 0.35 | 0.30 | 0.25 |
| 6" x 2" | 1.05 | 0.80 | 0.50 | 0.40 | 0.35 | 0.30 |


DESIGN EXAMPLES Multiple lengths and swivel attachment clip allow for design freedom. Below are some design layout examples from our MetalWorks Blades design guide.

1' x 4' Grid Layouts

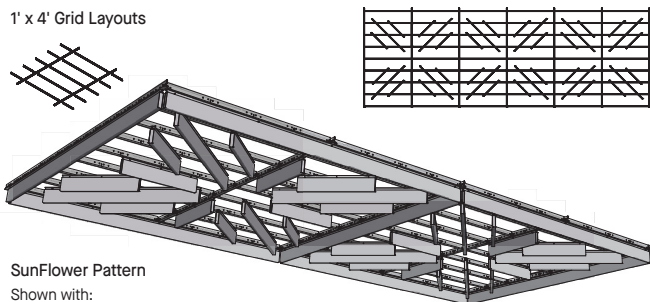

SunFlower Pattern
Shown with:
4 x 1 x 22-1/2" panels
4 x 1 x 46-1/2" panels

4' x 4' Grid Layouts

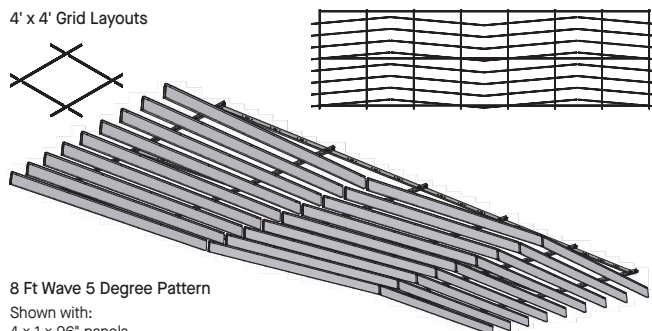

8 Ft Wave 5 Degree Pattern
Shown with:
4 x 1 x 96" panels

TechLine 877 276-7876

armstrongceilings.com/metalworksbladesclassics

Armstrong®
World Industries

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture



Declare.

RECYCLED
CONTENT
UP TO
15%

LEED V5

| COMMON MATERIALS FRAMEWORK | | Climate Health | EPD |
|----------------------------|-------------------|------------------|-----|
| Human Health | Declare Label HPD | Ecosystem Health | EPD |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |




SUSPENSION SYSTEM & ACCESSORIES

| | Item No. ♦ | Description | Dimensions (Inches) Nominal L x W x H | Color | PCS/CTN |
|-----------------------------|---------------|---------------------------------------|--|---|---------|
| Suspension Systems | 7301_ _ | Prelude® XL® 12" HD Main Beam | 144 x 15/16 x 1-11/16" | White, Silver Grey, Gun Metal Grey* | 20 |
| | XL7341 | Prelude XL 4" Cross Tee | 48 x 15/16 x 1-11/16" | White, Black* | 60 |
| | XL8320 | Prelude XL 2" Cross Tee | 24 x 15/16 x 1-11/16" | White, Black* | 60 |
| | 730136BL | Black 360 Prelude XL 12" HD Main Beam | 144 x 15/16 x 1-11/16" | Black | 20 |
| | XL734036BL | Black 360 Prelude XL 4" Cross Tee | 48 x 15/16 x 1-11/16" | Black | 60 |
| | XL732036BL | Black 360 Prelude XL 2" Cross Tee | 24 x 15/16 x 1-11/16" | Black | 60 |
| Wall-to-Wall Installations | 780036 | 12" Angle Molding | 144 x 7/8 x 7/8" | White, Black* | 30 |
| | HD7801_ _ | 10" Angle Molding | 120 x 7/8 x 7/8" | Silver Grey, Gun Metal Grey* | 30 |
| | BERC2 | Beam End Retaining Clip | N/A | N/A | 200 |
| Floating Cloud Installation | AX6STR_ _ _ ♦ | Axiom® Classic 6" Straight Trim | 120 x 3/4 x 5-13/16" | White, Black, Silver Grey, Gun Metal Grey* Black is recommended for Sequels panel finishes | N/A |
| | 7239 | Adjustable Trim Clip (ATC) | N/A | N/A | 50 |
| | 5344_ _ _ _ | 4" Effects Wood Looks Trim | Nominal 120" Length | Effects Finishes | 6 |
| | 5346_ _ _ _ | 6" Effects Wood Looks Trim | Nominal 120" Length | Effects Finishes | 6 |

♦ Add the 2-digit color suffix to the item number when specifying or ordering (e.g. AX6STR S G), add an extra digit "3" before the color suffix if paint is required inside and outside of trim (e.g. AX6STR 3 S G).

* Items with the same finish name will coordinate but may not be an exact color match.


ACCESSORIES

| | Item No. ♦♦ | Description | Color | Pcs/Ctn |
|---|--|---|--|---------|
|  | 7204_ _ | MetalWorks™ Blades – Classics Attachment Clip | Stainless Steel, Black Oxide | 100 |
|  | 7205D41 7205D61 7205D62 | MetalWorks Blades – Classics 4" x 1" Alignment Device 6" x 1" Alignment Device 6" x 2" Alignment Device | N/A | 24 |
|  | 8158D41_ _ _ _ 8158D61_ _ _ _ 8158D62_ _ _ _ | MetalWorks Blades – Classics 4" x 1" Field-Cut End Cap 6" x 1" Field-Cut End Cap 6" x 2" Field-Cut End Cap | Whitelume, Silverlume, Gun Metal, Sequels Finishes, Effects Finishes | 10 |

♦♦ When specifying or ordering, include the color suffix with the item number (e.g., 8158D41 E X C H).

SUSPENSION SYSTEMS

15/16"



PHYSICAL DATA

Material

Aluminum – thickness 0.032"

Surface Finish

Painted: Factory-applied polyester paint
Sequels™: Pre-coated coil
Effects™: Powder-coated, dye-sublimation, post-production finish

Custom colors and finishes also available. Contact TechLine for custom color matching requests at 1 877 276-7876.

Fire Performance

Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Acoustical Options

Perforated panels are supplied with a black fiberglass fleece acoustic infill bag to absorb sound (varies by Blades panel length).

Design Considerations

When installed, panels hang either 4-7/8" or 6-7/8" below the face of the grid, depending on the depth of Blade. Panels can be supported by intermediate duty main beams or cross tees, with 2 attachment clips per panel. See MetalWorks Blades – Classics design guide online for additional design layouts.

MetalWorks Blades – Classics can be cut in the field only when using the Field-Cut End Cap. See installation instructions for details.

Installation Considerations

Panels with certain product finishes, e.g., Effects™ and Natural Reflections, are not MetalWorks™ FASTPeel™ panels and will be protected by other means for packaging and handling purposes.

Design Support

For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Seismic Restraint

MetalWorks Blades – Classics are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting

Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty

Details at armstrongceilings.com/warranty

Weight

D41 panels: 0.50 LBS/LF

D61 panels: 0.61 LBS/LF

D62 panels: 0.68 LBS/LF

TechLine / 1 877 276-7876
armstrongceilings.com/metalworksbladesclassics
BPCS-5092-925

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit™ is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Armstrong®
World Industries

BLADES – Standard

