


## ► VISUAL V49 - V64



Visual V49



Visual V64

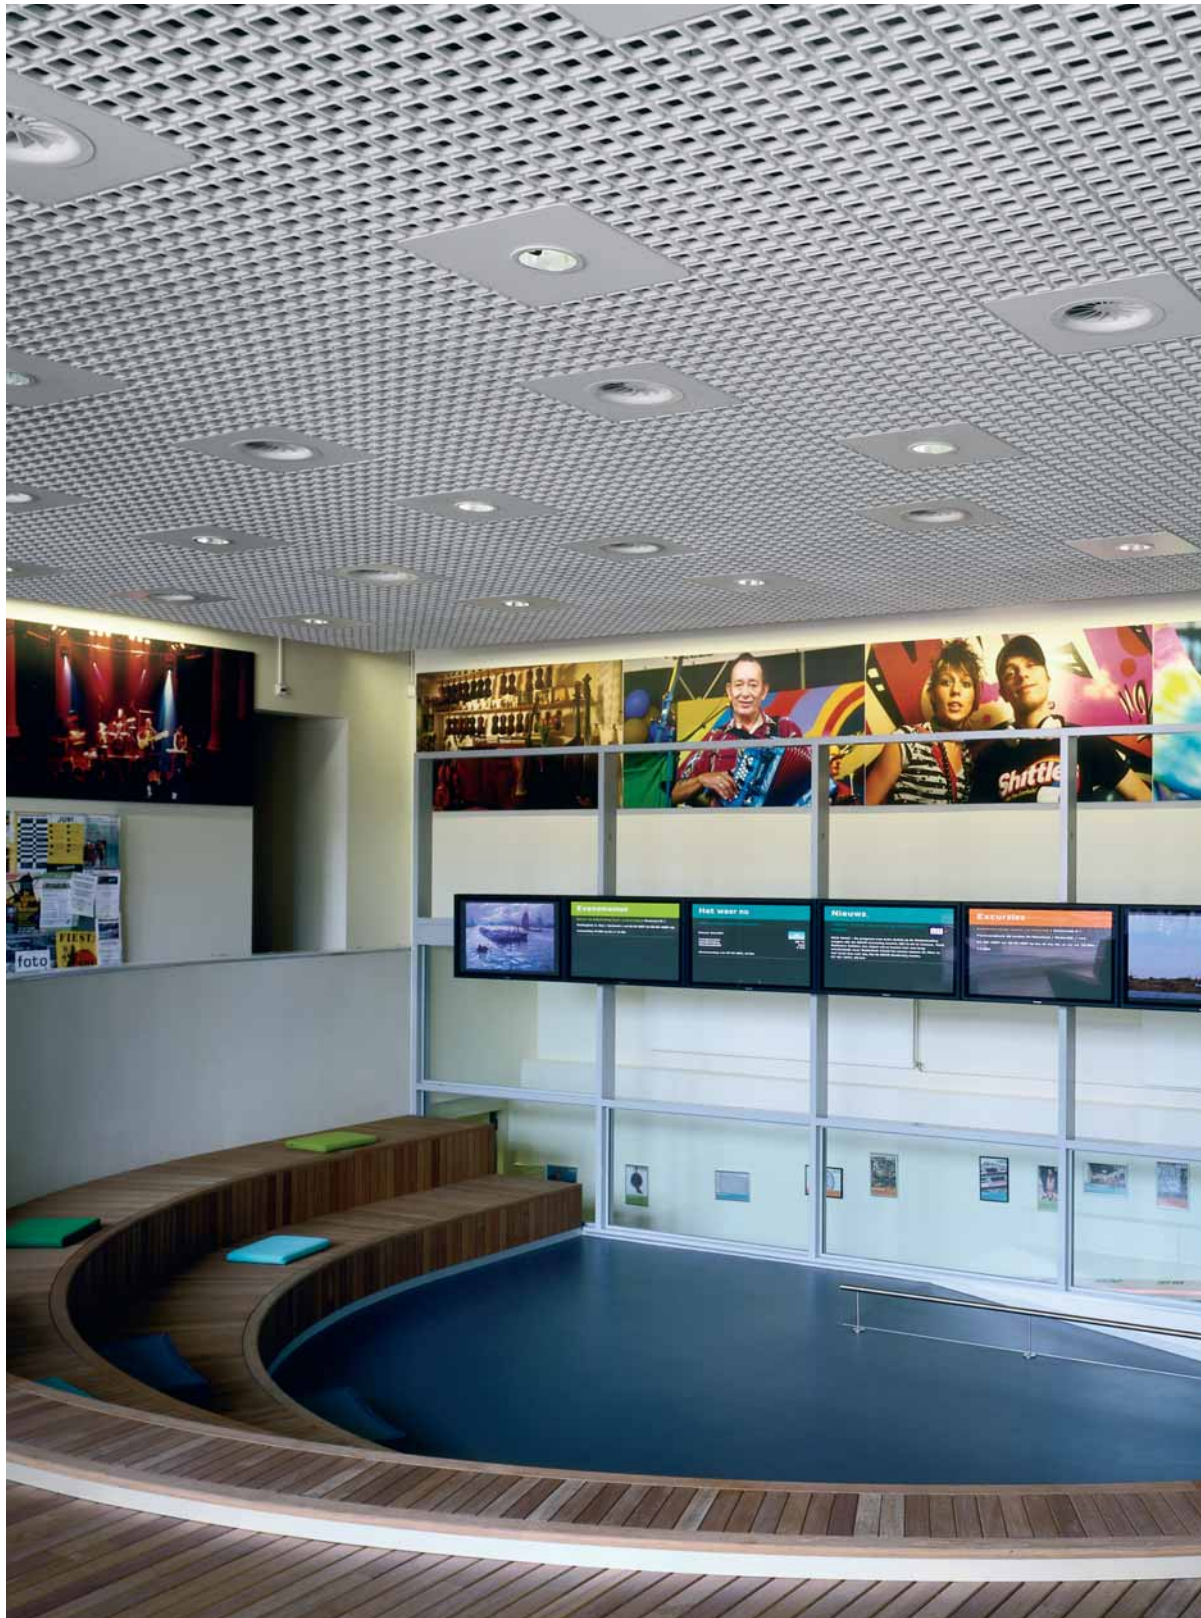


Visual V49

# ▶ VISUAL V49 - V64



VISUAL V49, V64	Visual V49	Visual V64
	<p>8580 M A/57.90 mm B/15 mm C/6.35 mm</p>	<p>8581 M A/47.20 mm B/15 mm C/6.35 mm</p>
	MICROLOOK	MICROLOOK
	<p>Prelude XL²/TL 15 mm</p>	<p>Prelude XL²/TL 15 mm</p>
	600 x 600 x 19 mm ..... 8580 M.....	600 x 600 x 19 mm ..... 8581 M.....

		Hz							
$\alpha_w$	NRC	125	250	500	1000	2000	4000		
● V49 + fleece									
<b>0.50(H)</b>	<b>0.50</b>	0.10	0.30	0.40	0.50	0.75	0.90	$\alpha_p$	
● V49 + fleece + 25mm x 20kg/m³ fibreglass overlay									
<b>0.95</b>	<b>0.90</b>	0.35	0.80	0.95	0.90	1.00	1.00	$\alpha_p$	

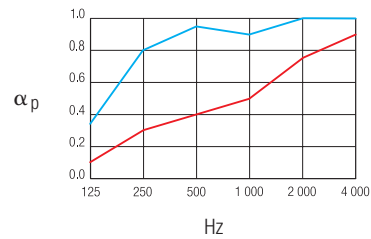

	EEA	A2-s1, d0
	RUS	Hard combustible (G-1): GOST 30244-94; V1, D1, T1 NPB 244-97

$\lambda = 0.052 - 0.057 \text{ W/mK}$

70 % RH

$\approx 4 \text{ kg/m}^2$

- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- А более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

[www.armstrong-europe.com](http://www.armstrong-europe.com)

**Armstrong**