

GEORGIAN™ GEORGIAN™ HIGH WASHABILITY

Square Lay-in & Tegular
medium texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Georgian Beveled Tegular panels with Prelude® XL® 15/16" suspension system

Medium-texture panels with a unique splatter-painted visual and options for high washability; offer standard or Total Acoustics® panel performance.

KEY SELECTION ATTRIBUTES

- Georgian™ is part of the Sustain® portfolio, and meets the most stringent industry sustainability compliance standards today
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics Performance (items 795 and 796 only)
- Unique splatter-painted visual
- Mold- and mildew-resistant surface
- High Washability items available
 - Meets USDA/FSIS guidelines for use in food processing establishments
- Durable –
 - Washable
 - Scrubbable
 - Impact-resistant
 - Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

TYPICAL APPLICATIONS


- Schools/classrooms (Items 795, 796)
- Corridors/conference rooms
- Kitchen/food preparation areas (Items 793, 794)

COLOR



White
(WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

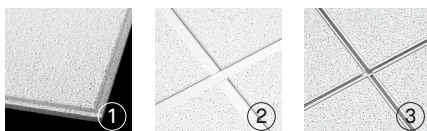

1. Georgian™ Beveled Tegular
2. Georgian™ Beveled Tegular with Prelude® 15/16" suspension system
3. Georgian™ Beveled Tegular with Silhouette® 9/16" suspension system 1/4" Reveal

GEORGIAN™ GEORGIAN™ HIGH WASHABILITY

Square Lay-in & Tegular
medium texture



Declare.

RECYCLED
CONTENT

UP TO
56%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓






















VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	
GEORGIAN™ 15/16" Square Lay-in	1	764	24 × 24 × 5/8"	
		763	24 × 48 × 5/8"	
15/16" Beveled Tegular	15	1752	24 × 24 × 5/8"	
9/16" Beveled Tegular	29, 44, 48, 52, 56	1753	24 × 24 × 5/8"	
GEORGIAN™ High Washability Panels, Unperforated 15/16" Square Lay-in	1	794	24 × 24 × 5/8"	
		793	24 × 48 × 5/8"	
SCHOOL ZONE® GEORGIAN 15/16" Square Lay-in	1	796	24 × 24 × 3/4"	
		795	24 × 48 × 3/4"	

PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

 UL Classified Acoustics		 Total Acoustics¹	 Fire Performance	 Light Reflect	 Bio-Block	 Humi-Guard	 Certified Low VOC Emissions	 DURABILITY				 Recycle Program	 30-Yr Warranty
 NRC + CAC	 NRC CAC	 Fire	 Light	 Anti-Mold/ Mildew	 Sag Resist	 Wash		 Scrub	 Impact	 Scratch	 Recycle		
0.55	33	N/A	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*
0.55	33	N/A	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*
0.55	35	N/A	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*
0.55	35	N/A	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*
N/A	33	N/A	Class A	0.88	*	*	*	*	*	*	*	*	*
N/A	33	N/A	Class A	0.88	*	*	*	*	*	*	*	*	*
0.65	35	GOOD	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*
0.65	35	GOOD	Class A	0.86	*	*	*	N/A	N/A	*	*	*	*

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL* labeled).

ASTM E1264 Classification

Type A, Form A1.2, Pattern G; Fire Class A

Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor - 1.6 (BTU units)

R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton

763, 793 - 0.67 LBS/SF; 96 SF/CTN
764, 794, 1752, 1753 - 0.72 LBS/SF; 64 SF/CTN
796 - 1 LBS/SF; 48 SF/CTN
795 - 1 LBS/SF; 64 SF/CTN

Minimum Order Quantity

1 carton, excludes made-to-order panels

Metric Items Available

1753M, 764M, 763M, 1752M, 796M, 795M, 794M, 793M - Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.